

## Digital manifold

**testo 570s - the digital manifold with 4-way valve block, Bluetooth and large data memory**

Long-term measurement with intelligent error analysis in the testo Smart App

World's longest battery life of up to 360 hours with rechargeable battery (USB-C) and batteries

Suitable for use with A3 and A2L refrigerants

Highest precision even at low pressure values due to measuring accuracy of 0.25% fs

All measurement data at a glance and graphical progress display thanks to large display

High durability with IP54 protection class



With the new testo 570s, we are opening up the future of intelligent long-term measurement on refrigeration and air conditioning systems as well as heat pumps. Digital fault analysis in the testo Smart App allows anomalies to be detected quickly and reliably. And with the world's longest runtime of up to 360 hours and large data memory, testo 570s is ideal for long-term measurements. Behind it is the hybrid system of rechargeable battery (USB-C) and 3 batteries.

The large screen of the testo 570s provides a quick overview of all measured values as well as a graphical progress display.

For uncomplicated measurement of temperature, vacuum and current, all probes automatically connect to the manifold via Bluetooth. To make measurement even easier, stored programs guide you through the measurement process and enable automatic determination of numerous plant parameters. The subsequent documentation and sending of data is also possible with just a few clicks in the testo Smart App.

Thanks to high robustness with protection class IP54, testo 570s continuously delivers high performance even under the most difficult conditions.




## Technical data / accessories / order data

General technical data	
Operating temperature	-20 to +50 °C
Storage temperature	-20 to +60 °C
Battery type	Built-in rechargeable battery: LI battery 18650 Replaceable battery: 3 alkaline batteries AA
Battery life	With built-in rechargeable battery: ≥220 h without Bluetooth®, without illumination ≥120 h with Bluetooth® and illumination With 3 AA batteries: ≥145 h without Bluetooth®, without illumination ≥75 h with Bluetooth® and illumination
Auto power off	after 10 minutes when not connected via Bluetooth®
Dimensions	229 x 112.5 x 71 mm
Weight	1.3 kg
Protection class	IP54
Bluetooth® technology/range	Bluetooth® 5.0 / 150 m
Compatibility	Requires iOS 11.0 or newer / Android 6.0 or newer requires mobile terminal device with Bluetooth® 4.0

Sensor types		
	Pressure	Temperature
Measuring range	-1 to 60 bar	-50 to +150 °C
Accuracy (at 22 °C)	±0.25 % fs	±0.5 °C
Resolution	0.01 bar	0.1 °C
Probe connections	3 x 7/16" – UNF + 1 x 5/8" – UNF	2 x plug-in (NTC)
Overload	65 bar	–

Measuring instrument accessories	Order no.	
Magnetic belt for digital manifolds for flexible use of the magnet or hook thanks to a simple exchange system, compatible with all digital manifolds from Testo	0564 1001	
Valve spare parts kit; exchange of 2 valve positioners with 4 valve positioner covers (red, blue and 2 x black), compatible with all digital manifolds from Testo.	0554 5570	

### Order data testo 570s


	testo 570s Smart digital manifold	testo 570s Smart Vacuum Kit Manifold with 2 clamp thermometers, 1 vacuum probe and case	testo 570s Smart Vacuum Kit with filling hoses incl. filling hose set (4 off)	testo 570s Smart Vacuum Kit with clamp meter incl. TRMS clamp meter
				
Kit components				
testo 570s smart digital manifold	✓	✓	✓	✓
2x testo 115i wireless clamp temperature probe		✓	✓	✓
testo 552i vacuum probe		✓	✓	✓
Hose filling set (4 hoses)			✓	
testo 770-3 TRMS clamp meter				✓
Calibration protocol for testo 570s	✓	✓	✓	✓
Instrument case		✓	✓	✓
Order no.	0564 5701	0564 5702	0564 5703	0564 5704

# testo Smart Probes / clamp meter testo 770-3

## testo 115i

testo 115i, clamp thermometer operated with smartphone, for measurement on pipelines with diameters of 6 to max. 35 mm, including batteries and calibration protocol

Order no. 0560 2115 02



## testo 552i

testo 552i, app-controlled wireless vacuum probe, including batteries and calibration protocol

Order no. 0564 2552



## testo 605i

testo 605i, thermohygrometer operated with smartphone, including batteries and calibration protocol

Order no. 0560 2605 02



### Sensor type NTC

Measuring range	-40 to +150 °C
Accuracy ±1 digit	±1.3 °C (-20 to +85 °C)
Resolution	0.1 °C

### General technical data

Compatibility	requires iOS 11.0 or newer, Android 6.0 or newer, requires mobile terminal device with Bluetooth® 4.0
Storage temperature	-20 to +60 °C
Operating temperature	-20 to +50 °C
Battery type	3 AAA batteries
Battery life	150 h
Dimensions	183 x 90 x 30 mm
Bluetooth® range	up to 100 m

### Sensor type pressure

Measuring range	0 to 26.66 mbar/ 0 to 20000 microns
Accuracy ±1 digit	±10 microns + 10% of m.v. (100 to 1000 microns)
Resolution	1 micron (0 to 1000 microns) 10 micron (1000 to 2000 microns) 100 micron (2000 to 5000 microns)
Connection	7/16" – UNF
Overload	6.0 bar / 87 psi relative 5.0 bar / 72 psi)

### General technical data

Connection	Bluetooth 4.2
Storage temp.	-20 °C to +50 °C
Operating temp.	-10 °C to +50 °C
Battery type	3 AAA batteries
Battery life	39 h
Auto power off	After 10 minutes when not connected via Bluetooth
Protection class	IP54
Dimensions	150 x 32 x 31 mm
Weight	142 g
Bluetooth® range	150 m

### Sensor type humidity – capacitive



Measuring range	0 to 100 %RH
Accuracy (at +25 °C) ±1 digit	±3.0 %RH (10 to 35 %RH) ±2.0 %RH (35 to 65 %RH) ±3.0 %RH (65 to 90 %RH) ±5 %RH (<10 %RH or >90 %RH)
Resolution	0.1 %RH

### Sensor type NTC

Measuring range	-20 to +60 °C
Accuracy ±1 digit	±0.8 °C (-20 to 0 °C) ±0.5 °C (0 to +60 °C)
Resolution	0.1 °C

### General technical data

Compatibility	requires iOS 11.0 or newer, Android 6.0 or newer, requires mobile terminal device with Bluetooth® 4.0
Storage temp.	-20 to +60 °C
Operating temp.	-20 to +50 °C
Battery type	3 AAA batteries
Battery life	150 h
Dimensions	218 x 30 x 25 mm 73 mm probe shaft
Bluetooth® range	up to 100 m

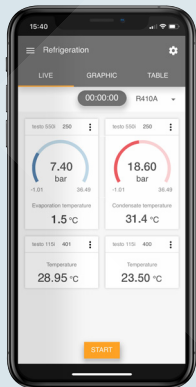

### The testo Smart App

- For all applications of the testo 570s – from measurement to documentation
- Remote operation of the measuring instrument or use as second screen
- Quick evaluation with all results at a glance, tabular view and graphical progress display
- Guided menus for all measuring tasks
- Create digital measurement reports including photos as PDF/CSV files on site and email them straight away
- Compatible with all Bluetooth®-enabled Testo measuring instruments for air conditioning/refrigeration systems and heat pumps

## testo 770-3

testo 770-3 TRMS clamp meter, incl. batteries and 1 set of measuring cables

Order no. 0590 7703



### Measuring ranges


Voltage	1 mV to 600 V AC/DC
Power	0.1 to 600 A AC/DC
µA	0.1 to 400 µA AC/DC
Resistance	0.1 Ω to 60 MΩ
Frequency	0.001 Hz to 10 kHz
Capacity	0.001 µF to 60,000 µF
Temperature	-20 to +500 °C

### General technical data

Basic accuracy	0.1 %
Display (counts)	6000
Measurement category	CAT IV 600 V CAT III 1000 V

Compatibility	requires iOS 11.0 or newer/ Android 6.0 or newer, requires mobile terminal device with Bluetooth® 4.0
Operating temperature	-10 to +50 °C
Storage temperature	-15 to +60 °C
Dimensions	243 x 96 x 43 mm
Weight	378 g
Approvals	CSA, CE
Standards	EN 61326-1, EN 61140
Other	True RMS, continuity test, power measurement, diode test, Bluetooth®, testo Smart App

# Probe

Probe type	Dimensions Probe shaft/probe shaft tip	Measuring range	Accuracy	Order no.
<b>Air probe</b>				
Precise, robust NTC air probe		-50 to +125 °C	±0.2 °C (-25 to +80 °C) ±0.4 °C (remaining meas. range)	0613 1712
<b>Surface probe</b>				
Clamp probe for temperature in kit for measurements on pipes from 6 to 35 mm diameter, NTC, fixed cable 1.5 m		-40 to +125 °C	±1 °C (-20 to +85 °C)	0613 5507
Clamp probe for temperature measurements on pipes from 6 to 35 mm diameter, NTC, fixed cable 5.0 m		-40 to +125 °C	±1 °C (-20 to +85 °C)	0613 5506
Pipe wrap probe with Velcro tape for pipe diameters of up to max. 75 mm, Tmax +75 °C, NTC, fixed cable 1.5 m		-50 to +70 °C	±0.2 °C (-25 to +70 °C) ±0.4 °C (-50 to -25.1 °C)	0613 4611
Pipe wrap probe (NTC) for pipe diameters of 5 to 65 mm, fixed cable 2.8 m		-50 to +120 °C	±0.2 °C (-25 to +80 °C)	0613 5605
Watertight NTC surface probe for flat surfaces, fixed cable 1.2 m		-50 to +150 °C Long-term measuring range +125 °C, briefly +150 °C (2 minutes)	±0.5% of m.v. (+100 to +150 °C) ±0.2 °C (-25 to +74.9 °C) ±0.4 °C (remaining meas. range)	0613 1912

1981 0934/dk/msp/02.2023

Subject to change, including technical modifications.