

Gas-actuated temperature switch Flameproof enclosure Ex d Model TAG

WIKA data sheet TV 31.61



Process Performance Series

Applications

- Temperature monitoring and control of processes
- Safety-critical applications in general process instrumentation, especially in the chemical and petrochemical industries, oil and gas industries, power generation incl. nuclear power plants, water/wastewater industries, mining

Special features

- No power supply needed for switching of electrical loads
- Robust switch enclosure from aluminium alloy, IP66, NEMA 4X
- Setting ranges from -30 ... +70 °C to 0 ... 600 °C
- 1 or 2 independent set points, SPDT or DPDT, high switching power up to AC 250 V, 20 A
- Remote mounting with capillary ≤ 10 m



Model TAG, remote mounting with capillary

Description

These high-quality temperature switches have been developed especially for safety-critical applications. The high quality of the products and manufacturing in accordance with ISO 9001 ensure reliable monitoring of your plant. In production, the switches are traced by quality assurance software at every step and subsequently are 100 % tested.

In order to ensure as flexible operation as possible, the temperature switches are fitted with micro switches, which enable the switching of an electrical load of up to AC 250 V, 20 A directly.

For lower switching power ratings, such as for PLC applications, argon gas-filled micro switches with gold-plated contacts can be selected as an option.

The measuring element is a gas-actuated system with a Bourdon tube element. This system allows a wide setting range up to 0 ... 600 °C.

The measuring system parts and the flexible spiral armour are made of stainless steel.

The model TAG temperature switch is extremely robust and guarantees optimal operating characteristics and the highest measuring performances with repeatability lower than 0.5 % of span.

Standard version

Measuring system

Gas-actuated temperature system (SAMA class III B)

Switch enclosure

Aluminium alloy, copper-free, epoxy resin coated, tamper-proof. Laser-engraved product label from stainless steel.

Ingress protection

IP66 per EN 60529 / IEC 60529, NEMA 4X

Permissible ambient temperature

-40 ... +85 °C

Switch contact

Micro switches with fixed dead band:

- 1 x or 2 x SPDT (single pole double throw)
- 1 x DPDT (double pole double throw)

Micro switches with adjustable dead band:

- 1 x SPDT (single pole double throw)

The DPDT function is realised with 2 simultaneously triggering SPDT micro switches within 0.2 % of the span.

Contact version		Electrical rating (resistive load)	
		AC	DC
UN	1 x SPDT, silver	250 V, 15 A	24 V, 2 A, 125 V, 0.5 A, 220 V, 0.25 A
US	1 x SPDT, silver, hermetically sealed, argon gas filling ¹⁾	250 V, 15 A	24 V, 2 A, 220 V, 0.5 A
UO	1 x SPDT, gold-plated, hermetically sealed, argon gas filling ¹⁾	125 V, 1 A	24 V, 0.5 A
UG	1 x SPDT, gold-plated	125 V, 1 A	24 V, 0.5 A
UR	1 x SPDT, silver, adjustable dead band	250 V, 20 A	24 V, 2 A, 220 V, 0.5 A
DN	2 x SPDT or 1 x DPDT, silver	250 V, 15 A	24 V, 2 A, 125 V, 0.5 A, 220 V, 0.25 A
DS	2 x SPDT or 1 x DPDT, silver, hermetically sealed, argon gas filling ¹⁾	250 V, 15 A	24 V, 2 A, 220 V, 0.5 A
DO	2 x SPDT, or 1 x DPDT gold-plated, hermetically sealed, argon gas filling ¹⁾	125 V, 1 A	24 V, 0.5 A
DG	2 x SPDT or 1 x DPDT, gold-plated	125 V, 1 A	24 V, 0.5 A

¹⁾ Permissible ambient temperature range: -30 ... +70 °C

Set point adjustment

The set point can be specified by the customer or factory-set within the setting range. Subsequent adjustment of the set point on site is made using the adjustment screw, which is fastened to the switch and thus secured against loss.

Repeatability of the set point

≤ 0.5 % of span

Distance between set points

For versions with 2 x SPDT the distance between the set points must be > 5 % of the respective span.

Ignition protection type

Ex d IIC T6/T4 ¹⁾ Gb (gas)

Ex tb IIIC T85/T135 ¹⁾ Db (dust)

¹⁾ The temperature class is related to the ambient temperature range. See the type examination certificate for further details.

Please specify:

Set point, switching direction for each contact, e.g.:

Set point 1: 30 °C, falling, set point 2: 60 °C, rising.

With two micro switches, the set points can be set independently of each other.

For optimal performance we suggest to adjust the set point between 25 ... 75 % of the span.

Example:

Setting range: 0 ... 100 °C with one switch contact

Repeatability: 0.5 % of 100 °C = 0.5 °C

Dead band: 4.5 °C (see table setting ranges)


2 x repeatability + dead band = 2 x 0.5 °C + 4.5 °C = 5.5 °C

Rising temperature: Adjust set point between 5.5 ... 100 °C.

Falling temperature: Adjust set point between 0 ... 94.5 °C.

Sensor dimensions

Remote mounting with capillary

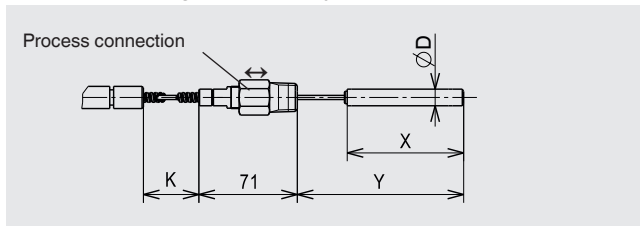

Bulb		Insertion length Y_{min} in mm	Capillary length K in m
Stem diameter $\varnothing D$ in mm	Active length X in mm		
12 (standard)	85 ²⁾	$\geq 145^{2)}$	2, 4, 6, 8, 10
9.5 (option)	135	≥ 195	

2) X = 103 mm; Y = 163 mm for setting range 0 ... 600 °C

Adjustable insertion length Y for remote mounting with capillary

Due to the flexibility of the spiral armour, the insertion length (Y) can be adjusted during installation with the sliding compression fitting. The values are calculated as per the following equation:

Minimum insertion length Y_{min} = see table above

Maximum insertion length Y_{max} = capillary length (K) x 150

Example:

Capillary length K: 2 m

Setting range: 0 ... 100 °C

Stem diameter $\varnothing D$: 12 mm

Minimum insertion length $Y_{min} = 145$ mm

Maximum insertion length $Y_{max} = 2 \times 150 \text{ mm} = 300$ mm

Adjustable insertion length $Y = 145 \dots 300$ mm

The capillary length is reduced accordingly.

Maximum capillary reduction

$$K^- = Y_{max} - Y_{min} = 300 - 145 = 155 \text{ mm}$$

Minimum capillary length

$$K_{min} = K - K^- = 2,000 - 155 = 1,845 \text{ mm}$$

Due to the adjustable insertion length (Y) of 145 ... 300 mm, the resulting capillary length (K) varies between 2.0 ... 1.845 m.

Process connection

Stainless steel compression fitting, sliding on capillary or stem

- ½ NPT male (standard)
- ¾ NPT male
- G ½ A male
- G ¾ A male

Electrical connection

- ½ NPT female (standard)
- ¾ NPT, M 20 x 1.5, G ½, G ¾ female
- Cable gland non-armoured, Ex d, nickel-plated brass
- Cable gland non-armoured, Ex d, stainless steel (AISI 304)
- Cable gland armoured, Ex d, nickel-plated brass
- Cable gland armoured, Ex d, stainless steel (AISI 304)

For cable connections to the internal terminal block use wire cross-sections between 0.5 ... 2.5 mm².

For the internal and external grounding cable connection to the protective conductor screws use wire cross-sections ≤ 4 mm².

Dielectric strength

Safety class I (IEC 61298-2: 2008)

Mounting

Wall mounting

- Standard: Mounting fixture from stainless steel (AISI 304)
- Option: Mounting bracket for 2" pipe mounting

Weight

approx. 2.6 kg (with 2 m capillary)

Setting range

Setting range	Working range	Proof temperature	Fixed dead band		Adjustable dead band
in °C	in °C	in °C	1 contact UN, US, UO, UG in °C	2 contacts DN, DS, DO, DG in °C	1 contact UR in °C
-30 ... +70	-40 ... +70	120	≤ 4.5	≤ 4.5	15 ... 35
0 ... 100	-40 ... +100	120	≤ 4.5	≤ 4.5	15 ... 35
0 ... 160	-40 ... +160	190	≤ 5	≤ 5	18 ... 35
0 ... 250	-40 ... +250	300	≤ 6	≤ 6	21 ... 45
0 ... 400	-40 ... +400	500	≤ 10	≤ 10	33 ... 77
0 ... 600	-40 ... +600	600	≤ 17	≤ 17	50 ... 115

Thermowell

In principle, the operation of a temperature switch without a thermowell is possible with low process-side loading (low pressure, low viscosity and low flow velocities). However, in order to enable exchanging the temperature switch during operation (e.g. instrument replacement or calibration) and to ensure a better protection of the instrument and also the plant and the environment, it is advisable to use a thermowell from the extensive WIKA thermowell portfolio.

For further information on the calculation of the thermowell, see Technical information IN 00.15.






Options

- Other process connection, also with adapter
- Capillary length to customer specification
- Permissible ambient temperature -60 ... +85 °C ¹⁾
- Helical bulb (ambient temperature: -30 ... +70 °C)
- Contact bulb, to measure surface temperatures on flat surfaces or pipes
- Offshore version ²⁾
- NACE version ²⁾
- SIL version (only available with contact US, UO)

1) Only available for contacts without hermetic sealing

2) WIKA recommends argon gas-filled contact versions, use of adjustable dead band allowed.


Approvals

Logo	Description	Country
	EC declaration of conformity <ul style="list-style-type: none"> ■ Low voltage directive 2006/95/EC, EN 60730-1 ■ ATEX ¹⁾ directive 94/9/EC; annex III, IV II 2 GD 	European Community
	IECEX ¹⁾ per IEC 60079-0, IEC 60079-1, IEC 60079-26, IEC 60079-31 Ex d IIC T6/T4 ²⁾ Gb Ex tb IIIC T85/T135 ²⁾ Db	IECEX member states
	EAC (option) Hazardous areas (option)	Eurasian Economic Community
	KOSHA (option) Hazardous areas	South Korea
	INMETRO (option)	Brazil

1) Double marking ATEX and IECEx on the same product label.

2) The temperature class is related to the ambient temperature range.

Manufacturer's information and certifications


Logo	Description
	SIL 2 rating (option) , per IEC 61508 Functional safety The electrical rating for DC applications is limited to 30 V ... 100 mA.

Certificates (option)

- 2.2 test report per EN 10204
- 3.1 inspection certificate per EN 10204

Approvals and certificates, see website

Dimensions in mm

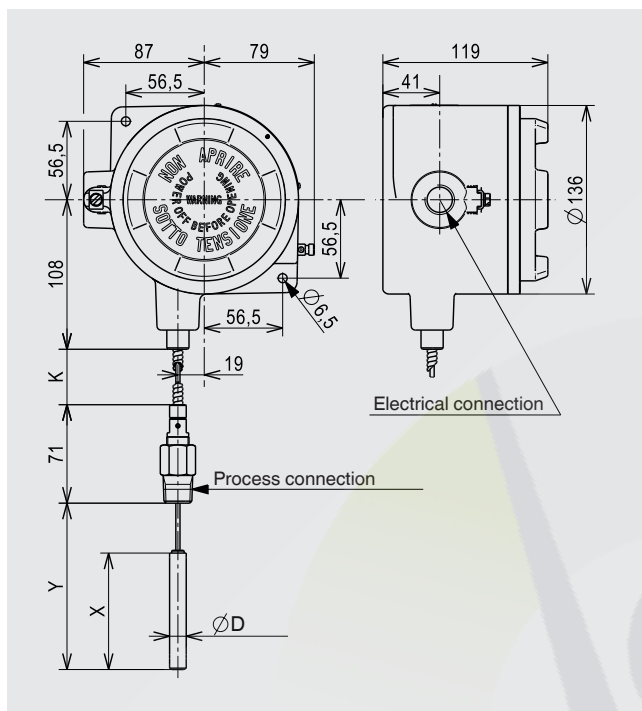

For sensor dimensions D, X and Y see page 3

Ordering information

Model / Mounting / Number of switches / Contact version / Capillary length / Setting range / Process connection / Electrical connection / Options

© 2011 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

WIKA data sheet TV 31.61 · 04/2016

Page 5 of 5

04/2016 EN



- c\ Resina 22-24 Nave 10-B, 28021 Madrid, Spain
- comercial@gavasa.com
- +34 917 230 930
- www.gavasa.com



Part of your business